

# Y Strainer

Fig. 7225

## Standard

Design: API 598 / DIN3202 F1  
 Flange: DIN2501 PN16  
 Dimensions: 15 mm(1/2")~200mm(8")


## Technical Data

Working Pressure: PN16  
 Testing Pressure: Shell: 24 bar  
 Working Temperature: - 25°C ~ 180°C  
 Medium: Water、 Oil、 Gas  
 Mesh: DN15~DN50: 1mm  
       DN65~DN200: 1.5~2.5mm

## Material

Part	Material	Standard
Body	Stainless Steel	A351 CF8 / CF8M / CF3M
Bonnet	Stainless Steel	A351 CF8 / CF8M / CF3M
Screen	Stainless Steel	ASTM 304 / 316
Gasket	PTFE	-
Plug	Stainless Steel	ASTM 304 / 316

## Schema

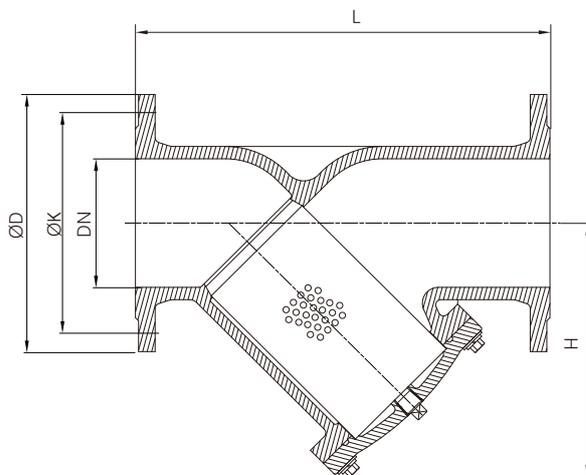

## Dimensions

DN	mm	15	20	25	32	40	50	65	80	100	125	150	200
	inch	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	5	6	8
L		130	150	160	180	200	230	290	310	350	400	480	600
H		75	90	100	115	130	150	190	225	230	280	300	400
D		95	105	115	140	150	165	185	200	220	250	285	340

Note: WARCO reserves the right to change dimensions without notice.